

American Standard

ONE

VESSEL LAVATORY FITTING

with EverClean™ Finish

Congratulations on purchasing your American Standard faucet with EverClean finish found only on American Standard faucets.

EverClean Finish

- One wipe effortlessly removes spots
- Eliminates the need for cleaners and scrubbing
- Permanent surface protectant remains beautiful for the life of the faucet
- EverClean™ available on: Polished Chrome, Satin Nickel, Stainless Steel, Polished Brass (or any combination of these finishes)

Installation Instructions 2064.15X




Certified to comply with ANSI A112.18.1M

M968917

To ensure that your installation proceeds smoothly-please read these instructions carefully before you begin.

Recommended Tools



Adjustable Wrench



Plumbers' Putty or Caulking



Regular Screwdriver



Phillips Screwdriver




Channel Locks

1 INSTALL LAVATORY FAUCET

CAUTION

Turn off hot and cold water supplies before beginning.

- Seat SEAL (1) into under side of ESCUTCHEON RING (2).
- Seat ESCUTCHEON RING (2) with collar facing up into groove in faucet base.
- Feed FAUCET SUPPLIES (3) and MOUNTING SHANK (4) through ESCUTCHEON RING (2) and hole in mounting surface.
- From below, install GASKET (5) and WASHER (6) onto SHANK (4). Secure Faucet with MOUNTING NUT (7). Before final tightening, adjust Faucet so that it is centered. Tighten MOUNTING NUT (7) to complete mounting.

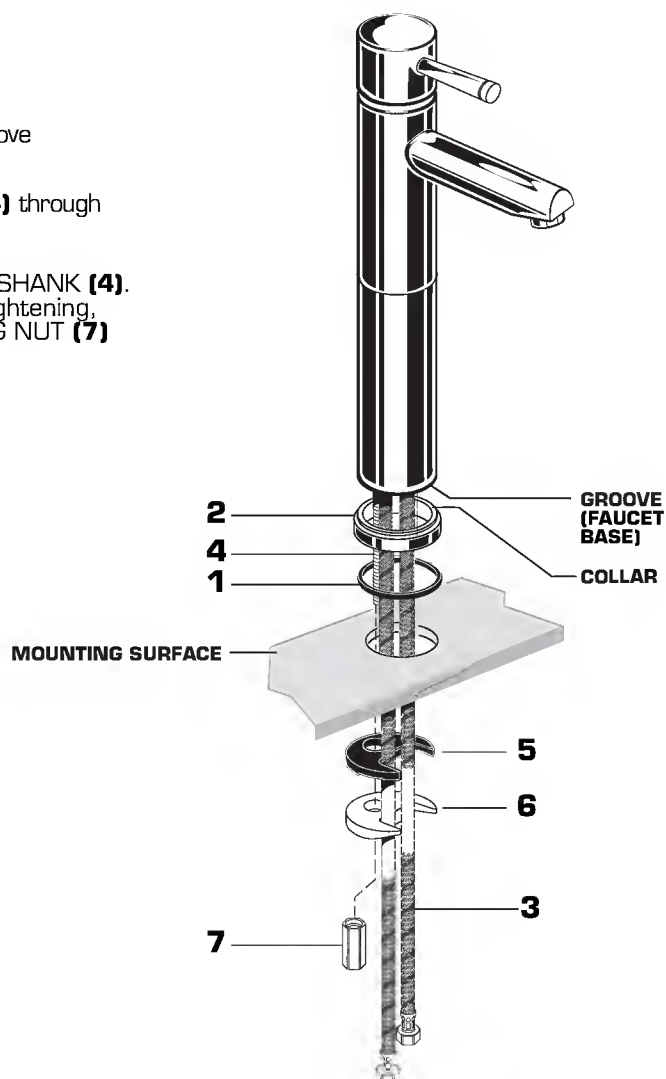



2

MAKE WATER SUPPLY CONNECTIONS

- Turn off hot and cold water supplies before beginning.
- Connect FLEXIBLE SUPPLIES (1, 2) directly to wall supplies. Connection on fitting supplies are 3/8" compression. Connect left supply to Hot and right supply to the Cold wall supply. Use adjustable wrench to tighten connections. Do not over tighten.
- Faucet supplies are 10" long from faucet base.

Note: If additional supply length is required, installer must purchase additional parts separately.


Important: If SUPPLY HOSES (1, 2) are too long, loop as illustrated to avoid kinking. Figure A.

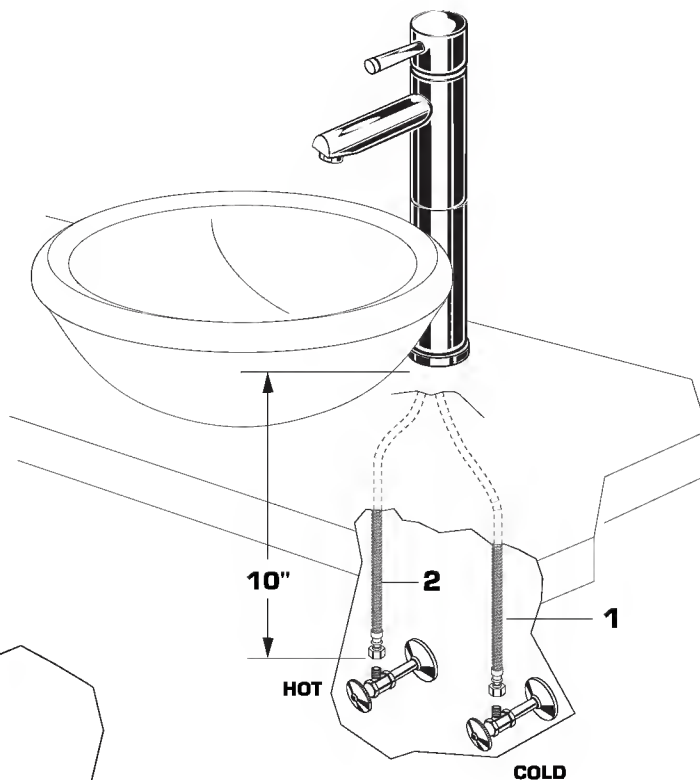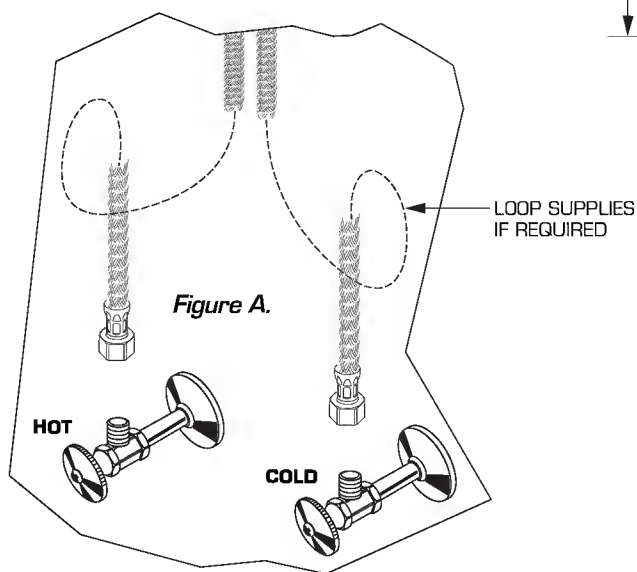

3


DRAIN INSTALLATION

- Apply a bead of PUTTY to underside of DRAIN BODY FLANGE (1).
- Feed DRAIN BODY (1) down through lavatory.
- Assemble GASKET (2) WASHER (3) and LOCKNUT (4) onto DRAIN BODY (1). Tighten LOCKNUT (4) firmly.
- Assemble TAILPIECE (5) to DRAIN BODY (1).

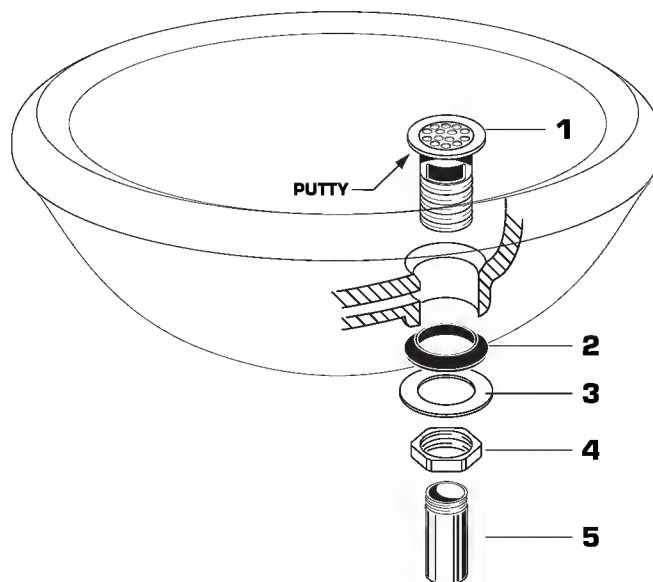

4 TEST INSTALLED FAUCET AND CHECK FOR LEAKS


- With HANDLE **(1)** in OFF position, turn on WATER SUPPLIES **(2)** and check all connections for leaks. ➡
- Remove AERATOR **(3)**.
- Operate HANDLE **(1)** to flush water lines thoroughly.
- Replace AERATOR **(3)**.

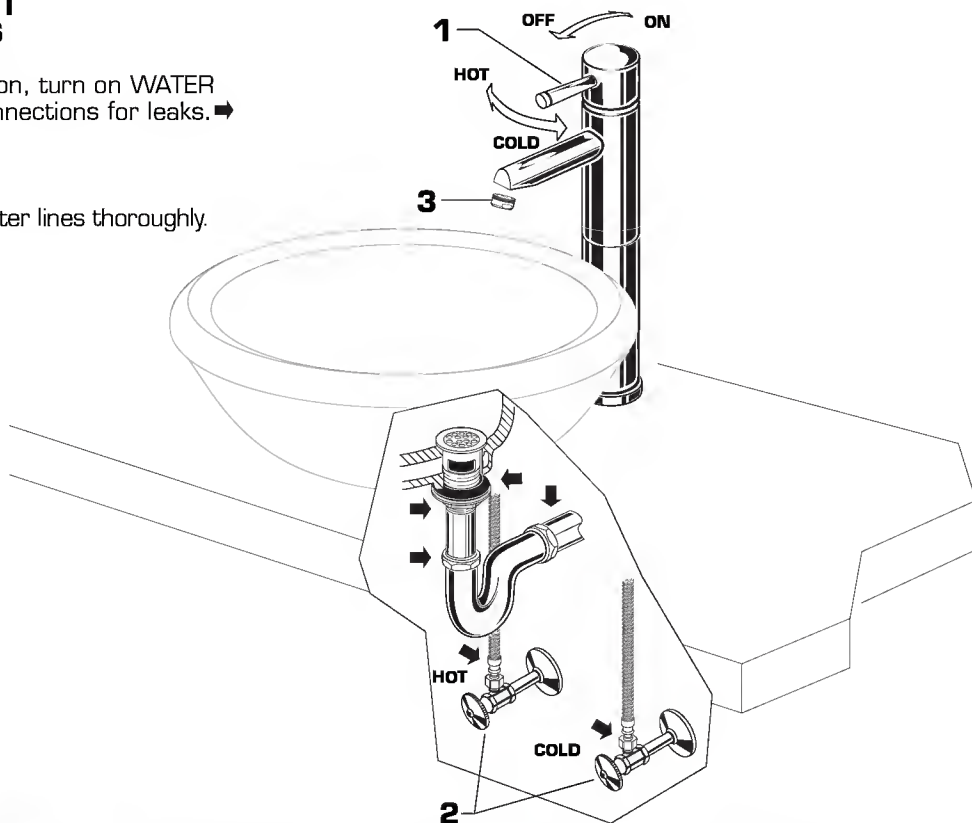

5 SERVICE CAUTION

Turn off hot and cold water supplies before beginning.

- To remove or replace cartridge
 - Turn valve to OFF position.
 - Pull out PLUG BUTTON **(1)** and remove HANDLE SCREW **(2)**.
 - Pull off HANDLE **(3)** and CAP **(4)**.
 - Unthread CARTRIDGE NUT **(5)** and remove.
 - Pull out CARTRIDGE **(6)**.
 - Inspect CARTRIDGE **(6)** and O-RINGS **(7)** for debris and clean if necessary.
 - Clean MANIFOLD **(8)** and rinse clean.
 - Reinstall CARTRIDGE **(6)** and O-RINGS **(7)** onto MANIFOLD **(8)**.
 - Reinstall CARTRIDGE NUT **(5)**, CAP and HANDLE ASSEMBLY.
- If spout drips, operate handle several times from OFF to ON and HOT to COLD position. Do not force - handles turn only 90°.

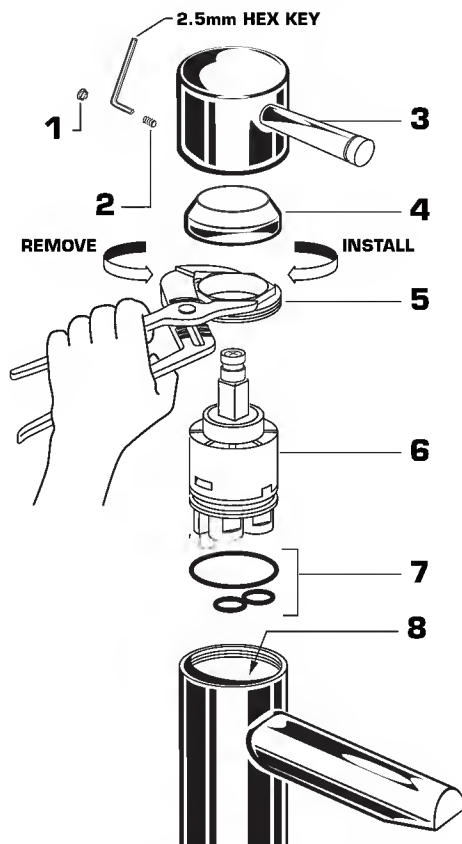

EverClean™ Finish Care Instructions

American Standard's EverClean finish will wipe clean with a soft, dry cloth. A soft cloth with clean water may also be used, if desired. No additional cleaning products are required.

DO NOT USE: Soaps, acid, polish, abrasives, harsh cleaners, or a cloth with a coarse surface.

M968917